

RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Lake Tarpon Sail and Tennis Club Condominium Association, Inc.

As of 04-03-2025 | FPAT File# MUD2523259

Felten Property Assessment Team

866.568.7853 | www.fpat.com



CERTIFICATION OF WINDSTORM MITIGATION AFFIDAVIT(S)

This is to certify the enclosed Windstorm Mitigation Inspection report prepared for Lake Tarpon Sail and Tennis Club Condominium Association, Inc. is the result of work performed by Felten Property Assessment Team and one or more of the individuals listed below.

In addition, we certify that, to the best of our knowledge and belief:

- > All facts contained in this report are true and accurate.
- > FPAT has no present or prospective interest in the subject property of this report, and also has no personal interest with respect to the parties involved.
- > FPAT has no bias with respect to the subject property of this report or to the parties involved with this assignment.
- Our engagement in this assignment was not contingent upon producing or reporting predetermined results.
- Our compensation is not contingent on any action or event resulting from this report.
- We have the knowledge and experience to generate accurate windstorm mitigation affidavit(s) for insurance purposes on all buildings contained within this report.
- We have performed a physical inspection of the subject risk(s) contained in this report.
- ➤ This report meets or exceeds the standards of the Citizens Inspection Outreach Program.

<u>Key Staff:</u>

Brad Felten

Sr. Adjuster # E149535
Flood Certification # 06060373
Certified Wind & Hurricane Mitigation
Inspector

Ian Wright


Sr. Adjuster # W273704 Certified Wind & Hurricane Mitigation Inspector

John Felten

Sr. Adjuster # D075772 Flood Certification # 05030007 Certified Building Contractor # CBC1255984 Certified Wind & Hurricane Mitigation Inspector




AERIAL MAPS OF PROPERTY

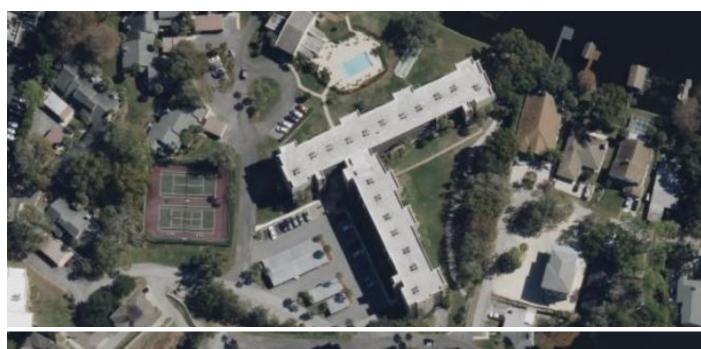





AERIAL MAPS OF PROPERTY

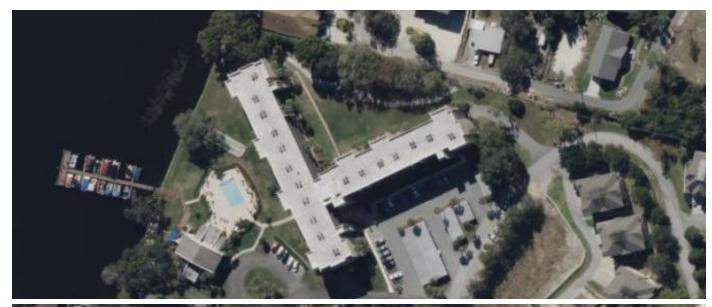





OIR-B1-1802 RECAPITULATION OF BUILDING MITIGATION FEATURES

Lake Tarpon Sail and Tennis Club Condominium

Building	Roof Covering	Roof Deck Attachment	Roof-Wall Attachment	Roof Shape	SWR	Opening Protection
90 S Highland Ave, Units 1101- 1418	FBC Equivalent	Reinforced Concrete Roof Deck	Structural	Flat Roof		None or Some Glazed Openings



MIT-BT-II & III RECAPITULATION OF BUILDING MITIGATION FEATURES

Lake Tarpon Sail and Tennis Club Condominium

Building	Roof Covering	Roof Deck Attachment	SWR	Opening Protection
90 S Highland Ave, Units 1101- 1418	FBC Equivalent	Reinforced Concrete Roof	No	None or Some Glazed Openings
		Deck		0.0200.00080





RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Prepared Exclusively for Lake Tarpon Sail and Tennis Club Condominium Association, Inc.

As of 04-03-2025 | FPAT File# MUD2523259

Felten Property Assessment Team

866.568.7853 | www.fpat.com



RECAPITULATION OF MITIGATION FEATURES For 90 S Highland Ave, Units 1101-1418

1. Building Code: Unknown or does not meet the requirements of Answer A or B

Comments: The year of construction was verified as 1976 per Pinellas County

Property Appraiser.

2. Roof Covering: FBC Equivalent

Comments: We were unable to locate a roofing permit with the local building

department; however, in our professional opinion the roof covering was replaced between 2011-2012. The roof covering replacement was confirmed via historical imagery provided by Pictometry. This roof was verified as not meeting the building code requirements

outlined on the mitigation affidavit.

3. Roof Deck Attachment: Reinforced Concrete Roof Deck

Comments: Inspection verified a roof structure composed of cast-in-place or pre-

cast structural concrete designed to be self-supporting and integrally

attached to the wall / support system.

4. Roof to Wall Structural

Attachment:

Comments: Inspection verified a roof structure composed of cast-in-place or pre-

cast structural concrete designed to be self-supporting and integrally

attached to the wall / support system.

5. Roof Geometry: Flat Roof

Comments: Inspection verified flat roof shape, refer to attached photographs.

6. SWR: No

Comments: No SWR verified.

7. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some impact rated opening protection. Not all

glazed openings were protected with impact resistant coverings.

Address Verification



Exterior Elevation



Exterior Elevation



Exterior Elevation



Exterior Elevation



Exterior Elevation



Roof Construction







Roof Construction












Roof Construction











Roof Construction

Roof Construction



Uniform Mitigation Verification Inspection Form

Maintain a cor	by of this	form and an	y documentation	provided with	the insurance	policy

Triantiant a copy of this form and any accumentation provided with the institutes pointy							
Inspection Date: 04-03-2025							
Owner Information							
Owner Name: Lake Tarpon Sail and Tenn	Contact Person: Andrew George						
Address: 90 S Highland Ave, Units 1101-1	1418	Home Phone:					
City: Tarpon Springs	Zip: 34689	Work Phone: (934) 243-0291					
County: Pinellas		Cell Phone:					
Insurance Company:		Policy #:					
Year of Home: 1976	# of Stories: 5	Email: andrewg@ameritechmail.com					

accom	E: Any documentation used in valpany this form. At least one phoh 7. The insurer may ask addition	tograph must acc	company this form	to validate each attribute m	arked in questions 3
the [] A. I [] B. I	ilding Code: Was the structure but HVHZ (Miami-Dade or Broward of Built in compliance with the FBC: 3/1/2002: Building Permit Applic For the HVHZ Only: Built in compliance a permit application with the Unknown or does not meet the recompliance.	counties), South F Year Built . For I ation Date (MM/DD/N liance with the SF a date after 9/1/19	lorida Building Cod nomes built in 2002/ YYYY) BC-94: Year Built 1994: Building Permi	le (SFBC-94)? /2003 provide a permit application. For homes built in 1	994, 1995, and 1996
OR	of Covering: Select all roof covering: Year of Original Installation/Replayering identified.				
CO	2.1 Roof Covering Type:	Permit Application Date	FBC or MDC Product Approval #	Year of Original Installation or Replacement	No Information Provided for Compliance
	[] 1. Asphalt/Fiberglass Shingle [] 2. Concrete/Clay Tile [] 3. Metal [] 4. Built Up [X] 5. Membrane [] 6. Other			2011-2012	0 0 0 0 0 0
[] B.	A. All roof coverings listed above me installation OR have a roofing po All roof coverings have a Miami-D permit application after 9/1/1994 One or more roof coverings do not No roof coverings meet the require	ermit application of ade Product Appression and before 3/1/20 meet the requirem	date on or after 3/1/0 roval listing current of 202 OR the roof is chents of Answer "A"	O2 OR the roof is original and at time of installation OR (for original and built in 1997 or la	built in 2004 or later. the HVHZ only) a roofing
[] A.	of Deck Attachment: What is the Plywood/Oriented strand board (O staples or 6d nails spaced at 6" alo -OR- Any system of screws, nail uplift less than that required for O Plywood/OSB roof sheathing with 24"inches o.c.) by 8d common na other deck fastening system or true	SB) roof sheathin ng the edge and 12 s, adhesives, othe ptions B or C beloh a minimum thic ils spaced a maximum the spaced as the space	g attached to the ro "in the fieldOR- er deck fastening sy ow. ekness of 7/16"inch mum of 12" inches	of truss/rafter (spaced a maxis Batten decking supporting wo stem or truss/rafter spacing that attached to the roof truss/raft in the fieldOR- Any system	od shakes or wood shingles. nat has an equivalent mean iter (spaced a maximum of of screws, nails, adhesives,
[] C.	a maximum of 12 inches in the field Plywood/OSB roof sheathing with 24"inches o.c.) by 8d common nadecking with a minimum of 2 nai	eld or has a mean h a minimum thic iils spaced a maxi	uplift resistance of ekness of 7/16"inch mum of 6" inches in	at least 103 psf. attached to the roof truss/rat n the fieldOR- Dimensiona	rter (spaced a maximum of l lumber/Tongue & Groove

Inspectors Initials Property Address 90 S Highland Ave, Units 1101-1418, Tarpon Springs

Any system of screws, nails, adhesives, other deck fastening system or truss/rafter spacing that is shown to have an equivalent

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FPAT File #MUD2523259 or greater resistance than 8d common nails spaced a maximum of 6 inches in the field or has a mean uplift resistance of at least

[X] D. Reinforced Con	crete Roof Deck.
[] E. Other:[] F. Unknown or unide[] G. No attic access.	entified.
4. Roof to Wall Attack	hment: What is the <u>WEAKEST</u> roof to wall connection? (Do not include attachment of hip/valley jacks within routside corner of the roof in determination of WEAKEST type)
[] Tru top pl	ss/rafter anchored to top plate of wall using nails driven at an angle through the truss/rafter and attached to the ate of the wall, or tal connectors that do not meet the minimal conditions or requirements of B, C, or D
Minimal conditions	to qualify for categories B, C, or D. All visible metal connectors are:
	ared to truss/rafter with a minimum of three (3) nails, and ched to the wall top plate of the wall framing, or embedded in the bond beam, with less than a ½" gap from the blocking or truss/rafter and blocked no more than 1.5" of the truss/rafter, and free of visible severe corrosion.
	tal connectors that do not wrap over the top of the truss/rafter, or
[] Me position	tal connectors with a minimum of 1 strap that wraps over the top of the truss/rafter and does not meet the nail on requirements of C or D, but is secured with a minimum of 3 nails.
[] C. Single Wraps	letal connectors consisting of a single strap that wraps over the top of the truss/rafter and is secured with a
	ninimum of 2 nails on the front side and a minimum of 1 nail on the opposing side.
beam, minim [] Met both s	tal Connectors consisting of 2 separate straps that are attached to the wall frame, or embedded in the bond on either side of the truss/rafter where each strap wraps over the top of the truss/rafter and is secured with a num of 2 nails on the front side, and a minimum of 1 nail on the opposing side, or tal connectors consisting of a single strap that wraps over the top of the truss/rafter, is secured to the wall on ides, and is secured to the top plate with a minimum of three nails on each side.
	or bolts structurally connected or reinforced concrete roof.
[] F. Other:[] G. Unknown or unid[] H. No attic access	entified
	hat is the roof shape? (Do not consider roofs of porches or carports that are attached only to the fascia or wall of er unenclosed space in the determination of roof perimeter or roof area for roof geometry classification).
[] A. Hip Roof	Hip roof with no other roof shapes greater than 10% of the total roof system perimeter. Total length of non-hip features: ; Total roof system perimeter:
[X] B. Flat Roof	Roof on a building with 5 or more units where at least 90% of the main roof area has a roof slope of less than 2:12. Roof area with slope less than 2:12: sq ft; Total roof area: sq ft
[] C. Other Roof	Any roof that does not qualify as either (A) or (B) above.
[] A. SWR (also called sheathing or fo from water intr	Resistance (SWR): (standard underlayments or hot-mopped felts do not qualify as an SWR) Sealed Roof Deck) Self-adhering polymer modified-bitumen roofing underlayment applied directly to the am adhesive SWR barrier (not foamed-on insulation) applied as a supplemental means to protect the dwelling usion in the event of roof covering loss.
[] C. Unknown or unde	termined.

Inspectors Initials Property Address 90 S Highland Ave, Units 1101-1418, Tarpon Springs

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

7. **Opening Protection:** What is the **weakest** form of wind borne debris protection installed on the structure? **First**, use the table to determine the weakest form of protection for each category of opening. **Second**, (a) check one answer below (A, B, C, N, or X) based upon the lowest protection level for ALL Glazed openings **and** (b) check the protection level for all Non-Glazed openings (.1, .2, or .3) as applicable.

•	ening Protection Level Chart	Glazed Openings			Non-Glazed Openings		
openi form	an "X" in each row to identify all forms of protection in use for each ng type. Check only one answer below (A thru X), based on the weakest of protection (lowest row) for any of the Glazed openings and indicate eakest form of protection (lowest row) for Non-Glazed openings.	Windows or Entry Doors	Garage Doors	Skylights	Glass Block	Entry Doors	Garage Doors
N/A	Not Applicable- there are no openings of this type on the structure		Х	Х	Х		Χ
Α	Verified cyclic pressure & large missile (9-lb for windows doors/4.5 lb for skylights)						
В	Verified cyclic pressure & large missile (4-8 lb for windows doors/2 lb for skylights)						
С	Verified plywood/OSB meeting Table 1609.1.2 of the FBC 2007						
D	Verified Non-Glazed Entry or Garage doors indicating compliance with ASTM E 330, ANSI/DASMA 108, or PA/TAS 202 for wind pressure resistance						
	Opening Protection products that appear to be A or B but are not verified						
N	Other protective coverings that cannot be identified as A, B, or C						
Х	No Windborne Debris Protection	Χ				Х	

- [] A. Exterior Openings Cyclic Pressure and 9-lb Large Missile (4.5 lb for skylights only) All Glazed openings are protected at a minimum, with impact resistant coverings or products listed as wind borne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level A in the table above).
 - Miami-Dade County PA 201, 202, and 203
 - Florida Building Code Testing Application Standard (TAS) 201, 202, and 203
 - American Society for Testing and Materials (ASTM) E 1886 and ASTM E 1996
 - Southern Standards Technical Document (SSTD) 12
 - For Skylights Only: ASTM E 1886 and ASTM E 1996
 - For Garage Doors Only: ANSI/DASMA 115
 - [] A.1 All Non-Glazed openings classified as A in the table above, or no Non-Glazed openings exist
 - A.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level B, C, N, or X in the table above
 - [] A.3 One or More Non-Glazed Openings is classified as Level B, C, N, or X in the table above
- [] B. Exterior Opening Protection- Cyclic Pressure and 4 to 8-lb Large Missile (2-4.5 lb for skylights only) All Glazed openings are protected, at a minimum, with impact resistant coverings or products listed as windborne debris protection devices in the product approval system of the State of Florida or Miami-Dade County and meet the requirements of one of the following for "Cyclic Pressure and Large Missile Impact" (Level B in the table above):
 - ASTM E 1886 and ASTM E 1996 (Large Missile 4.5 lb.)
 - SSTD 12 (Large Missile 4 lb. to 8 lb.)
 - For Skylights Only: ASTM E 1886 and ASTM E 1996 (Large Missile 2 to 4.5 lb.)
 - ☐ B.1 All Non-Glazed openings classified as A or B in the table above, or no Non-Glazed openings exist
 - ☐ B.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level C, N, or X in the table above
 - ☐ B.3 One or More Non-Glazed openings is classified as Level C, N, or X in the table above
- [] <u>C. Exterior Opening Protection- Wood Structural Panels meeting FBC 2007</u> All Glazed openings are covered with plywood/OSB meeting the requirements of Table 1609.1.2 of the FBC 2007 (Level C in the table above).
 - ☐ C.1 All Non-Glazed openings classified as A, B, or C in the table above, or no Non-Glazed openings exist
 - ☐ C.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level N or X in the table above
 - C.3 One or More Non-Glazed openings is classified as Level N or X in the table above

Inspectors Initials Property Address 90 S Highland Ave, Units 1101-1418, Tarpon Springs

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

FP.	AΤ	File	e #M)	IID2	2523	225	Q

[] <u>N.</u>	Exterior Opening Protection (unverified shutter systems)	tems with no documentat	ion) All	Glazed openings are protected with				
	protective coverings not meeting the requirements of "B" with no documentation of compliance (Level N is		r systems	s that appear to meet Answer "A" or				
	N.1 All Non-Glazed openings classified as Level A, B, C, or	N in the table above, or no No	on-Glazed	openings exist				
	N.2 One or More Non-Glazed openings classified as Level D in the table above, and no Non-Glazed openings classified as Level X in the table above							
	N.3 One or More Non-Glazed openings is classified as Leve	l X in the table above						
[X] <u>X</u> .	None or Some Glazed Openings One or more Glazed	openings classified and Lev	el X in tl	ne table above.				
	MITIGATION INSPECTIONS MUST B Section 627.711(2), Florida Statutes, provi							
Qual	ified Inspector Name: John Felten	License Type: CBC		License or Certificate #: CBC1255984				
Inspe	ection Company: Felten Property Assessment Team		Phone:	866-568-7853				
Quali	fied Inspector – I hold an active license as a:	(check one)						
	ome inspector licensed under Section 468.8314, Florida Statute ining approved by the Construction Industry Licensing Board			er of hours of hurricane mitigation				
	uilding code inspector certified under Section 468.607, Florida eneral, building or residential contractor licensed under Section							
	ofessional engineer licensed under Section 471.015, Florida Sta							
	ofessional architect licensed under Section 481.213, Florida Sta							
	ry other individual or entity recognized by the insurer as posses rification form pursuant to Section 627.711(2), Florida Statutes		ns to prop	erly complete a uniform mitigation				
	duals other than licensed contractors licensed under							
	Section 471.015, Florida Statues, must inspect the strees under s.471.015 or s.489.111 may authorize a dire							
	ence to conduct a mitigation verification inspection.							
I,	<u>John Felten</u> am a qualified inspector and I ctors and professional engineers only) I had my emplo							
and I a	agree to be responsible for his/her work.							
	R. A.							
Qualif	ied Inspector Signature:Dat	e: <u>04-03-2025</u>						
is subj approj	lividual or entity who knowingly or through gross neg ect to investigation by the Florida Division of Insurar priate licensing agency or to criminal prosecution. (Se es this form shall be directly liable for the misconduct	ce Fraud and may be sub ection 627.711(4)-(7), Flori	ject to ao ida Statu	dministrative action by the ttes) The Qualified Inspector who				
perfor	med the inspection.							
	Recowner to complete: I certify that the named Qualified ence identified on this form and that proof of identification							
Sign	ature:	Date:						
obtai	dividual or entity who knowingly provides or utters an or receive a discount on an insurance premium to we meanor of the first degree. (Section 627.711(7), Flori	which the individual or ent						
The defi	initions on this form are for inspection purposes only and cannot b	e used to certify any product or	constructio	on feature as offering protection from				

hurricanes.

Inspectors Initials Property Address 90 S Highland Ave, Units 1101-1418, Tarpon Springs

OIR-B1-1802 (Rev. 01/12) Adopted by Rule 69O-170.0155

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.



RESERVE STUDIES | INSURANCE APPRAISALS | WIND MITIGATION



Windstorm Mitigation Report (MIT-BT II & III)

Lake Tarpon Sail and Tennis Club Condominium Association, Inc. 90 S Highland Ave, Units 1101-1418

Tarpon Springs, FL 34689

Prepared Exclusively for Lake Tarpon Sail and Tennis Club Condominium Association, Inc.

As of 04-03-2025 | FPAT File# MUD2523259



Felten Property Assessment Team

866.568.7853 | www.fpat.com

RECAPITULATION OF MITIGATION FEATURES For 90 S Highland Ave, Units 1101-1418

1. Roof Covering: FBC Equivalent

Comments: We were unable to locate a roofing permit with the local building

department; however, in our professional opinion the roof covering was replaced between 2011-2012. The roof covering replacement was confirmed via historical imagery provided by Pictometry. This roof was verified as not meeting the building code requirements

outlined on the mitigation affidavit.

2. Roof Deck Attachment: Reinforced Concrete Roof Deck

Comments: Inspection verified a roof structure composed of cast-in-place or pre-

cast structural concrete designed to be self-supporting and integrally

attached to the wall / support system.

3. SWR: No

Comments: No SWR verified.

4. Opening Protection: None or Some Glazed Openings

Comments: Inspection verified some impact rated opening protection. Not all

glazed openings were protected with impact resistant coverings.





Exterior Elevation



Exterior Elevation



Exterior Elevation



Exterior Elevation




Exterior Elevation



Roof Construction




Roof Construction

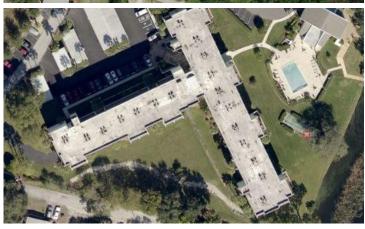

Roof Construction



Roof Construction

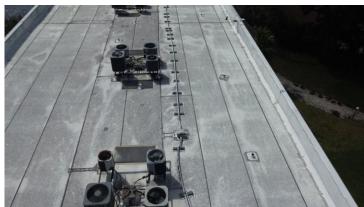

Roof Construction



Roof Construction



Roof Construction



Roof Construction



Roof Construction

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # MUD2523259

This Mitigation Inspection Form must be completed to capture mitigation features applicable to a Type II (4 to 6 story) or Type III (7 or more story) building. This Inspection Form is required for either residential condominium unit owners or commercial residential applicants requesting mitigation credits in such buildings.

WIND LOSS MI	ITIGA	TION INFORMATION	
PREMISES #:	1	SUBJECT OF INSURANCE: Lake Tarpon Sail and Tennis Club Condominium POLICY #:	
BUILDING #:	1	STREET ADDRESS: 90 S Highland Ave, Units 1101-1418, Tarpon Springs, FL 34689	
# STORIES:	5	BLDG DESCRIPTION:5-Story Residential Condominium Building	
BUILDING TYPE:		[X] (4 to 6 stories) [] (7 or more stories)	

Terrain Exposure Category must be provided for each insured location.

I hereby certify that the building or unit at the address indicated above **TERRAIN EXPOSURE CATEGORY** as defined under the Florida Building Code is (Check One): **[X] Exposure C** or **[] Exposure B**

Certification below for purposes of **TERRAIN EXPOSURE CATEGORY** above does not require personal inspection of the premises.

Certification of Wind Speed is required to establish the basic wind speed of the location (Complete for Terrain B only if Year Built On or After Jan. 1, 2002).

I hereby certify that the basic WIND SPEED of the building or unit at the address indicated above based upon county wind speed lines defined under the Florida Building Code (FBC) is (Check One): [] ≥100 or [] ≥110 or [X] ≥120

Certification of Wind Design is required when the buildings is constructed in a manner to exceed the basic wind speed design established for the structure location (Complete for Terrain B only if Year Built On or After Jan.1, 2002).

I hereby certify that the building or unit at the address indicated above is designed and mitigated to the Florida Building Code (FBC) WIND DESIGN of (Check One): ☐ ≥100 or ☐ ≥110 or ☐ ≥120

Certification for the purpose of establishing the basic **WIND SPEED or WIND SPEED DESIGN** above does not require personal inspection of the premises.

Specify the type of mitigation device(s) installed:

NOTE: Any documentation used in validating the compliance or existence of each construction or mitigation attribute must accompany this form. At least one photo documenting the existence of each visible and accessible construction or mitigation attribute marked in Sections 1 through 4 must accompany this form.

1. Roof Coverings

Roof Covering Material: TPO Date of Installation: 2011-2012

Level A (Non FBC Equivalent) – Type II or III

One or more roof coverings that do not meet the FBC Equivalent definition below.

[X] Level B (FBC Equivalent) – Type II or III

Single-Ply, Modified Bitumen, Sprayed Polyurethane foam, Metal, Tile, Built-up, Asphalt Shingle or Rolled Roofing, or other roof covering membranes/products that at a minimum meet the 2001 or later Florida Building Code or the 1994 South Florida Building Code and have a Miami-Dade NOA or FBC 2001 Product Approval listing that is/was current at the time of installation.

All mechanical equipment must be adequately tied to the roof deck to resist overturning and sliding during high winds. Any flat roof covering with flashing or coping must be mechanically attached to the structure with face fasteners (no clip/cleat systems), and asphalt roof coverings on flat roofs must be 10 years old or less.

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # MUD2523259

2.	Roof Deck Attachment [] No Attic Access
	Devel A – Wood or Other Deck Type II only
	Roof deck composed of sheets of structural panels (plywood or OSB). Or
	Architectural (non-structural) metal panels that require a solid decking to support weight and loads. Or
	Other roof decks that do not meet Levels B or C below.
	Level B – Metal Deck Type II or III
	Metal roof deck made of structural panels fastened to open-web steel bar joists and integrally attached to the wall.
	[X] Level C - Reinforced Concrete Roof Deck Type, II or III A roof structure composed of cast-in-place or pre-cast structural concrete designed to be self-supporting and integrally attached to wall/support system.
3.	Secondary Water Resistance [X] None
	[] Underlayment
	A self-adhering polymer modified bitumen roofing underlayment (thin rubber sheets with peel and stick underside located beneath the roof covering and normal felt underlayment) with a minimum width of 6" meeting the requirements of ASTM D 1970 installed over all plywood/OSB joints to protect from water intrusion. All secondary water resistance products must be installed per the manufacturer's recommendations. Roofing felt or similar paper based products are not acceptable for secondary water resistance.
	[] Foamed Adhesive
	A foamed polyurethane sheathing adhesive applied over all joints in the roof sheathing to protect interior from water intrusion.
4.	Opening Protection [X] None or Some
	[] Class A (Hurricane Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (9 lb.) impact requirements of:
	□ SSTD12;
	☐ ASTM E 1886 and ASTM E 1996;
	☐ Miami-Dade PA 201, 202, and 203;
	☐ Florida Building Code TAS 201, 202 and 203.
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.
	[] Class B (Basic Impact) – All glazed openings (windows, skylights, sliding glass doors, doors with windows, etc) less than 30 feet above grade must be protected with impact resistant coverings (e.g. shutters), impact resistant doors, and/or impact resistant glazing that meet the Large Missile (4.5 lb.) impact requirements of:
	☐ ASTM E 1886 and ASTM E 1996
	All glazed openings less than 30 feet above grade shall meet the Large Missile Test standard referenced above. All glazed openings between 30 and 60 feet above grade must meet the Small Missile Test of the respective standard. For buildings located in the HVHZ (High Velocity Hurricane Zone) all glazed openings greater than 60 feet above grade must also meet the Small Missile Test of the respective standard.

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.

CITIZENS PROPERTY INSURANCE CORPORATION BUILDING TYPE II AND III MITIGATION INSPECTION FORM

FPAT File # MUD2523259

CERTIFICATION

I certify that I hold an active license as a: (CHECK ONE OF THE FOLLOWING)

	ilding contractor license	d under Section 489.	111, Florida	Statutes.		
☐ Building code	inspector certified unde	er Section 468.607, F	lorida Statu	tes.		
☐ Professional	architect licensed under	Section 481.213, Flo	rida Statute	s.		
☐ Professional	engineer licensed under	Section 471.015, Flor	rida Statutes	s.		
	rsonally inspected the premis my professional opinion, base					
characteristics exist a premium discount on make a health or safe	ction Form and the information the Location Address listed insurance provided by Citizety certification or warranty, expending to which the undersignal of the control of t	above and for the purpos ens Property Insurance xpress or implied, of any	e of permitting Corporation a kind, and noth	g the Named Insurand for no other paining in this Form s	red to receive a property ins purpose. The undersigned shall be construed to impos	surance does not se on the
Name of Company:	Felten Property As	ssessment Team		Phone:	(866)-568-7853	_
Name of Inspector	John Felten	License Type	СВС	License #	CBC1255984	_
Inspection Date:	04-03-2025					
Signature:	KAT			Date:	04-03-2025	-
Applicant/Insured's Signature*:	-			Date:		-

^{*}Applicant /Insured's signature must be from the Board President and another member of the board for condo and homeowner's associations or an officer of the named insured for all other business entities.

[&]quot;Any person who knowingly and with intent to injure, defraud, or deceive any insurer files a statement of claim or an application containing any false, incomplete, or misleading information is guilty of a felony of the third degree."

^{*}This verification form is valid for up to five (5) years provided no material changes have been made to the structure or inaccuracies found on the form.